



linea flat

## FLAT SMALL COIBENTATA

con sottotetto in PVC

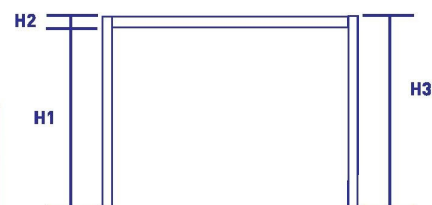
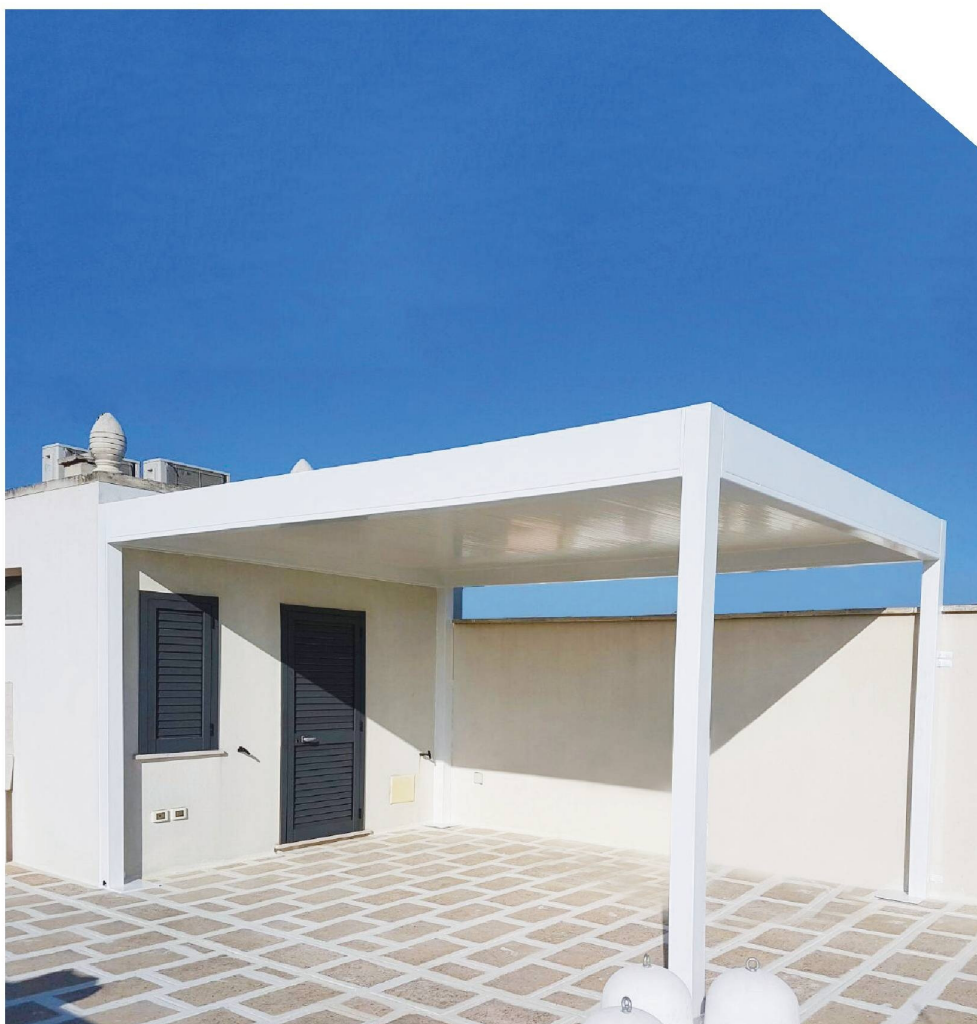


TABELLA ALTEZZE

MISURE (cm)	H1 (cm)	H2 (cm)	H3 (cm)
300X300	230	20	250
300X400	230	20	250
300X500	230	20	250
300X600	230	20	250
400X300	230	20	250
400X400	230	20	250
400X500	230	20	250
400X600	230	20	250
500X300	230	20	250
500X400	230	20	250
500X500	230	20	250
500X600	230	20	250

TABELLA PESI

MISURE (cm)	PESO (KG)
300X300	495
300X400	570
300X500	640
300X600	715
400X300	570
400X400	660
400X500	750
400X600	840
500X300	640
500X400	750
500X500	840
500X600	920

### Caratteristiche

- **altezza sotto trave standard: 230 cm**
- struttura senza pendenze perimetrali
- gronda integrata con scarico acqua nei piantoni
- struttura in acciaio zincato a caldo e verniciato di serie
- copertura in pannelli coibentati
- le verniciature sono alle polveri epossidiche (tabella colori pag. 181)

