



linea flat

FLAT SMALL TELO FISSO

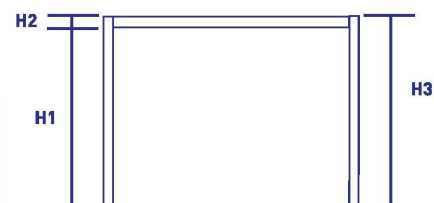


TABELLA ALTEZZE

| MISURE (cm) | H1 (cm) | H2 (cm) | H3 (cm) |
|-------------|---------|---------|---------|
| 200X300 | 230 | 20 | 250 |
| 200X400 | 230 | 20 | 250 |
| 200X500 | 230 | 20 | 250 |
| 200X600 | 230 | 20 | 250 |
| 300X300 | 230 | 20 | 250 |
| 300X400 | 230 | 20 | 250 |
| 300X500 | 230 | 20 | 250 |
| 300X600 | 230 | 20 | 250 |
| 400X300 | 230 | 20 | 250 |
| 400X400 | 230 | 20 | 250 |
| 400X500 | 230 | 20 | 250 |
| 400X600 | 230 | 20 | 250 |

TABELLA PESI

| MISURE (cm) | PESO (KG) | N° ROMPIT. |
|-------------|-----------|------------|
| 200X300 | 360 | 4 |
| 200X400 | 400 | 5 |
| 200X500 | 435 | 6 |
| 200X600 | 480 | 7 |
| 300X300 | 405 | 4 |
| 300X400 | 450 | 5 |
| 300X500 | 490 | 6 |
| 300X600 | 535 | 7 |
| 400X300 | 450 | 4 |
| 400X400 | 500 | 5 |
| 400X500 | 550 | 6 |
| 400X600 | 600 | 7 |

Caratteristiche

- **altezza sotto trave standard: 230 cm**
- struttura senza pendenze perimetrali
- gronda integrata con scarico acqua nei piantoni
- struttura in acciaio zincato a caldo e verniciata di serie
- telo in pvc ignifugo cl.2 (tabella colori pag. 182)
- le verniciature sono alle polveri epossidiche (tabella colori pag. 181)

