



linea flat

## FLAT TRAMA

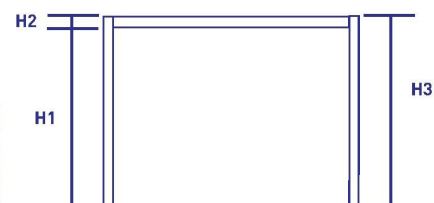


TABELLA ALTEZZE

MISURE (cm)	H1 (cm)	H2 (cm)	H3 (cm)
200x300	220	8	228
200x400	220	8	228
200x500	220	8	228
200x600	220	8	228
300x300	220	8	228
300x400	220	8	228
300x500	220	8	228
300x600	220	8	228
400x300	220	8	228
400x400	220	8	228
400x500	220	8	228
400x600	220	8	228

TABELLA PESI


MISURE (cm)	PESO (KG)
200x300	155
200x400	175
200x500	200
200x600	220
300x300	185
300x400	205
300x500	240
300x600	265
400x300	210
400x400	235
400x500	280
400x600	305

N° ROMPIRATTA

SPORGENZA	Q.TÀ
CM. 300	4
CM. 400	5
CM. 500	7
CM. 600	8

### Caratteristiche

- **altezza sotto trave standard: 220 cm**
- struttura senza pendenze perimetrali
- struttura in acciaio zincato a caldo e verniciata di serie
- telo in pvc ignifugo cl.2 (tabella colori pag. 182)
- le verniciature sono alle polveri epossidiche (tabella colori pag. 181)



**piantone**  
pillar

**trave**  
**perimetrale**  
perimetrical  
beam

**profilo**  
**rompiratta**  
profile  
rompiratta