

MAXI CURVO

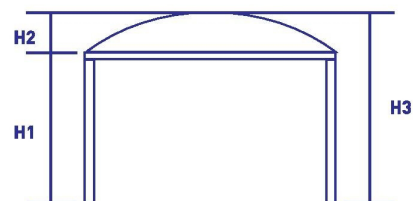


TABELLA ALTEZZE


| MISURE (cm) | H1 (cm) | H2 (cm) | H3 (cm) |
|-------------|---------|---------|---------|
| 700X700 | 300 | 165 | 465 |
| 800X800 | 300 | 165 | 465 |
| 900X900 | 300 | 170 | 470 |
| 1000X1000 | 300 | 180 | 480 |
| 1100X1100 | 300 | 190 | 490 |
| 1200X1200 | 300 | 195 | 495 |

TABELLA PESI


| MISURE (cm) | PESO (KG) |
|-------------|-----------|
| 700X700 | 960 |
| 800X800 | 1060 |
| 900X900 | 1160 |
| 1000X1000 | 1260 |
| 1100X1100 | 1440 |
| 1200X1200 | 1560 |

Caratteristiche

- **altezza sotto trave standard: 280 cm**
- gronda integrata con scarico acqua nei piantoni
- struttura in acciaio zincato a caldo
- telo in pvc ignifugo cl.2 (tabella colori pag. 182)
- le verniciature sono alle polveri epossidiche (tabella colori pag. 181)



piantone
pillar



trave perimetrale
perimetrical beam



diagonali
diagonals



traversa di controvento
cross bar against the wind