



linea summer

## SUMMER 100 NEW

Apertura manuale o motorizzata


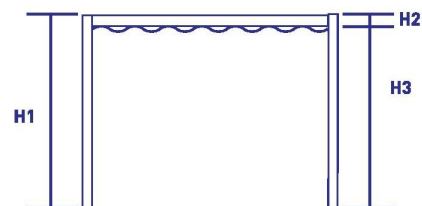


TABELLA ALTEZZE

MISURE (cm)	H1 (cm)	H2 (cm)	H3 (cm)	H4 (cm)
standard	250	10	240	215

TABELLA PESI


MISURE (cm)	PESO (KG)
300X300	200
300X400	220
300X500	235
300X600	250
400X300	215
400X400	235
400X500	255
400X600	270
500X300	250
500X400	270
500X500	295
500X600	320
600X300	265
600X400	290
600X500	315
600X600	340

N° ROMPIRATTA

MISURE (cm)	Q.TÀ
cm.300	4
cm.400	6
cm.500	8
cm.600	9

### Caratteristiche

- **altezza sotto trave standard: 240 cm**
- piantoni in acciaio zincato e verniciato alle polveri epossidiche
- travi perimetrali esclusive in alluminio verniciato alle polveri epossidiche (peso 5 Kg/mt)
- copertura a movimentazione con cinghia dentata e pulegge in alluminio
- apertura a comando manuale ad argano oppure motorizzato con telecomando
- telo pvc ignifugo cl.2 (tabella colori pag. 182)
- le verniciature sono alle polveri epossidiche (tabella colori pag. 181)

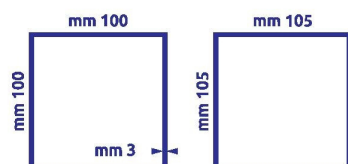

piantone  
pillar

trave  
perimetrale  
perimetrical  
beam