
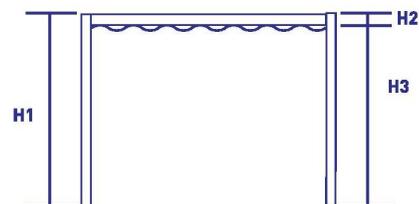


## SUMMER 80 APERTURA MANUALE



**TABELLA ALTEZZE**

MISURE (cm)	H1 (cm)	H2 (cm)	H3 (cm)	H4 (cm)
300X300	250	8	242	215
300X400	250	8	242	215
300X500	250	8	242	215
400X300	250	8	242	215
400X400	250	8	242	215
400X500	250	8	242	215

**TABELLA PESI**


MISURE (cm)	PESO (KG)
300X300	150
300X400	170
300X500	190
400X300	165
400X400	185
400X500	210

**N° ROMPIRATTA**


MISURE (cm)	Q.TÀ
cm.300	4
cm.400	6
cm.500	8

### Caratteristiche

- **altezza sotto trave standard: 242 cm**
- struttura in acciaio zincato e verniciato di serie
- copertura a movimentazione manuale lungo binari in acciaio zincato e verniciato
- telo pvc ignifugo cl.2 (tabella colori pag. 182)
- le verniciature sono alle polveri epossidiche (tabella colori pag. 181)



**piantone**  
pillar



**trave perimetrale**  
perimetrical beam